


# Biodiesel Glycerin Soap Processing



Tel: (614) 453-5221


air motor or electric motor

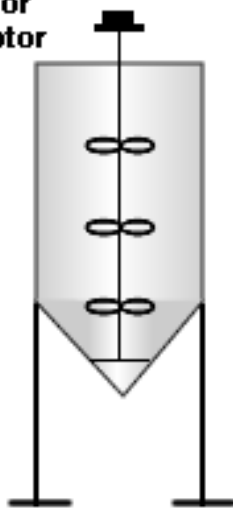

60 Gal Tank for Soap Processing

1 hour process time

40lb wooden molds

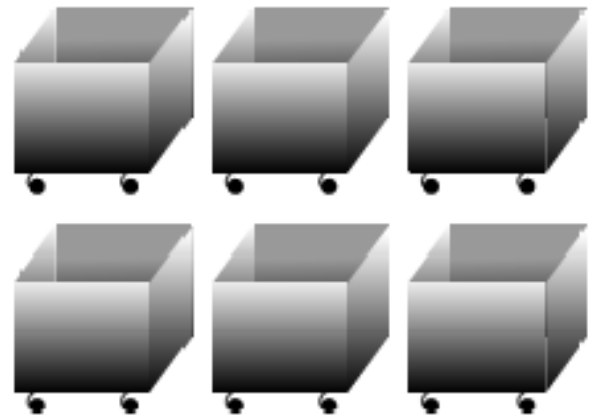


24 hour time to harden inside the mold

Unmolded 40lb Soap Blocks



Guillotine

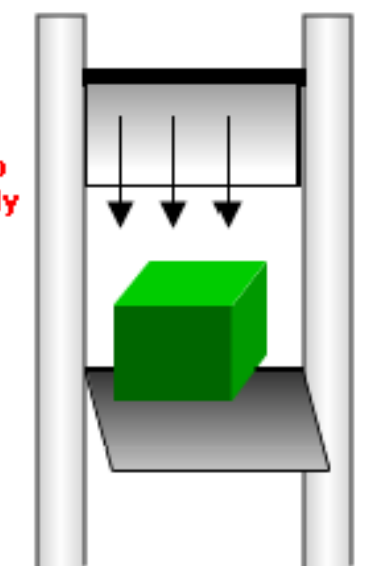

Cut blocks into bars immediately after unmold

Soap Curing, Drying, and Packaging



Curing/Drying for 2 weeks, then package and distribute